


FIRMWARE UPDATE

Product	CV-03 (3rd generation Converter ; black enclosure)
Goals	* reprogram the firmware to correct bugs

1	WHITE COVER DISASSEMBLY
1.1	Remove the 4 screws on white cover
1.2	Gently tighten the enclosure in a vice
1.3	Push on the white cover with a screwdriver on the rear slot. The silicone glue should break.
1.4	Clean the cover and the aluminium enclosure from glue

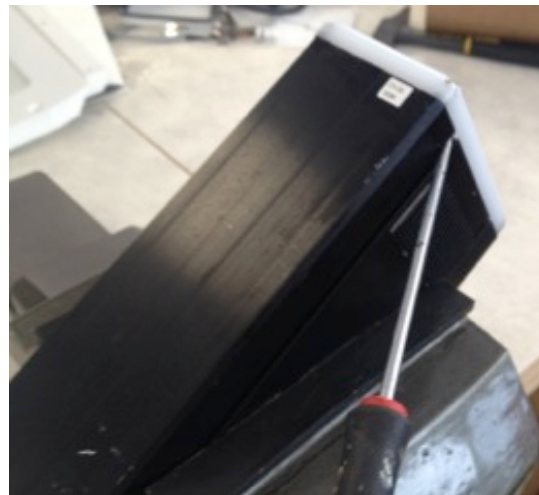

4	REASSEMBLY
4.1	Put some black / transparent silicone mastic in a small plastic syringe
4.2	Apply a small joint on the aluminium box
4.3	Screw back the cover
4.4	Clean the glue excess with an alcoholic solution

